

Roger Access Control System


CEB12 Installation Manual

Firmware version: 1.0.0.4

Hardware version: v1.0

Document version: Rev. C

CE

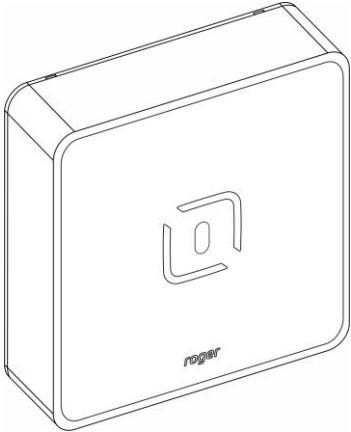

DESIGN AND APPLICATION

CEB12 is a contactless exit button which, after recognizing that the hand is approaching the front panel, temporarily switches on its electrical output. Basically, CEB12 has been designed to be used as a non-contact room exit button, and it can perform this function via a master device (e.g. access controller, intercom) or independently as standalone device. CEB12 can be powered independently from dedicated 12V DC/AC voltage source or in series with the energy receiver (electric strike), which it controls. The front panel of the device is made of natural glass and can be cleaned with disinfectants.

CHARACTERISTICS

- Contactless exit button
- 12 VDC/AC power supply or from door strike circuit
- Adjustable detection distance (approx. 7-14 cm)
- Adjustable output activation time 1-5s
- Transistor output 12VDC/1A
- Overload and overvoltage protection
- LED backlight
- Tamper contact
- Indoor operation only
- Glass front panel
- Surface mounting enclosure with dimensions 85x85x22 mm
- CE mark

INSTALLATION

Configuration of detection distance

CEB12 offers two levels of detections distance i.e. LOW and HIGH. The level is selected with jumper on DISTANCE contacts.




Fig. 1 LOW detection distance




Fig. 2 HIGH detection distance

Configuration of output activation time

Output activation time for standalone operation is programmed with the RELEASE TIME button. In order to program the time, press the button and hold it down for the time for which the output is to be activated after detection of hand. During programming, the RED LED indicator located in the center of the front panel lights up. Time parameter is recorded when the button is released or automatically after exceeding the maximum activation time (5s).




Fig. 3 Location of RELEASE TIME button




Fig. 4 Screw terminals

Table 1. CEB12 screw terminals	
Name	Description
12V	12VDC power supply
GND	Ground
NO	Transistor output (NO)
COM	Transistor output (COM) internally connected with GND
TMP1	Tamper contact
TMP2	Tamper contact

Connection diagrams

Connection to controller – independent power supply

This primary scenario of operation consists in connection of CEB12 to master device i.e. access controller which further controls door lock with its output. The example of connection is given in fig. 5 below.

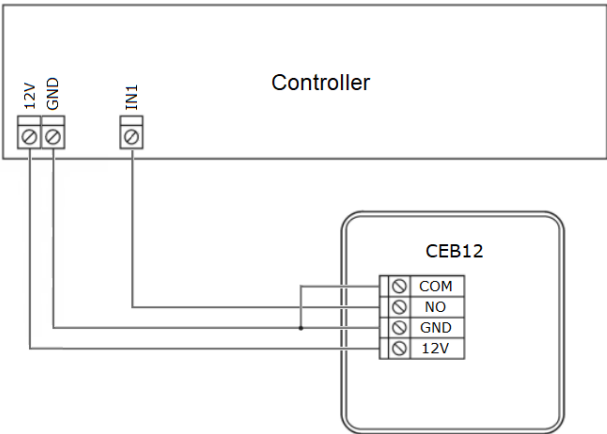


Fig. 5 Connection of CEB12 to controller – independent power supply

Connection to controller – power supply in series with door lock

In this scenario of operation it is necessary to install resistor 220-470R 1W (not included) as in fig. 6. In such case the value of resistance affects CEB12 recovery time.

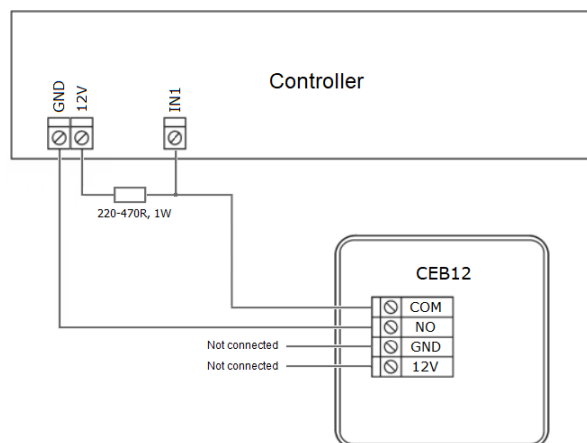


Fig. 6 Connection of CEB12 to controller – power supply in series with door lock

Standalone operation – dedicated power supply

In this scenario of operation CEB12 controls door lock directly without master device (e.g. access controller) and it is supplied independently from power supply unit. Output activation time is configured with RELEASE TIME button.

Note: The maximal current of door lock cannot exceed 1A.

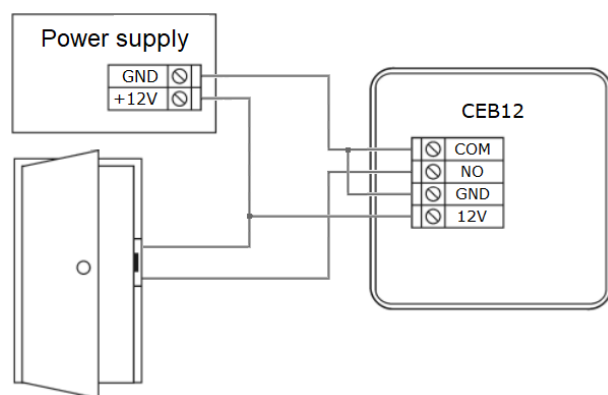


Fig. 7 Standalone operation – independent power supply

Standalone operation – power supply in series with door lock

In this scenario of operation CEB12 controls door lock directly without master device (e.g. access controller) and it is supplied in series with door lock. Output activation time is programmed with the RELEASE TIME button. Alternatively 12VAC transformer can be used instead of 12VDC PSU.

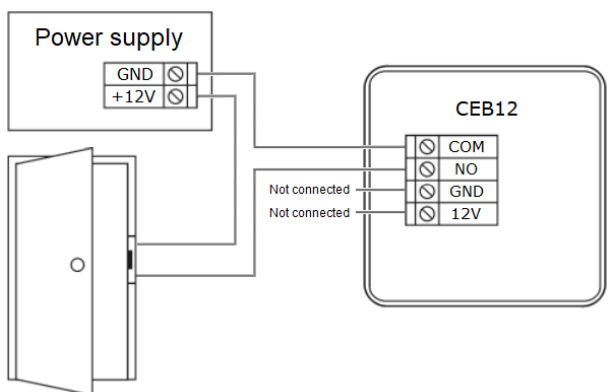


Fig. 8 Standalone operation – power supply in series with door lock

Green backlight

On the front panel of CEB12 there is frame with green backlight. When the backlight is on then device is ready for operation and it awaits hand detection. The backlight switches off when its transistor output is activated. The backlight switches off also during programming with RELEASE TIME button.

Wall mounting and installation guidelines

The device consists of front panel and base. Prior to CEB12 mounting both parts must be disassembled using included plastic key which must be inserted into each hall. Alternatively a flathead screwdriver can be used for disassembly.

Note: Each latch is released when plastic key is inserted into hole. Do not rotate key ending or lever any latch.

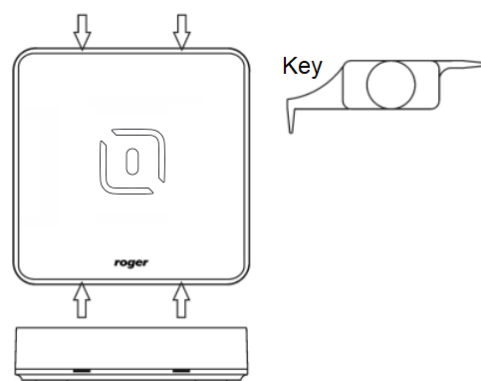


Fig. 9 Enclosure opening

Installation guidelines

- Install device on wall far from sources of heat and moisture.
- In particular, it is not allowed to install the reader in places with high humidity such as saunas, swimming pools, car washes, etc.
- It is recommended to install device on Ø60mm flush mounting box.
- All electric connections must be made with power supply switched off.
- Run connection wires through hole in device base and then connect wires to screw terminals.
- Front panel can be regularly cleaned with wet cloth and mild detergent.

Note: Damages resulting from improper maintenance or use are not covered by warranty.

SPECIFICATION**Table 2. Specification**

Supply voltage	12VDC or 12VDC/AC
Average current consumption	5 mA
Output	Transistor output 1A max load
Output activation time	Programmable in range of 1 - 5s and 1s resolution
Environmental class (acc. to EN 50131-1)	Class II, indoor general conditions, temperature: -10°C- +50°C, relative humidity: 10 to 95% (no condensation)
Tamper protection	Isolated contact, NC type (normally closed when enclosure is assembled and attached), 24V/50mA
IP code	IP30
Dimensions HxWxD	85 x 85 x 26 mm
Weight	~ 100g
Certificates	CE

ORDERING INFORMATION**Table 3. Ordering information**

CEB12	Contactless exit button
-------	-------------------------

PRODUCT HISTORY**Table 4. Product history**

Version	Released	Description
v1.0	05/2022	The first commercial version of the product



This symbol placed on a product or packaging indicates that the product should not be disposed of with other wastes as this may have a negative impact on the environment and health. The user is obliged to deliver equipment to the designated collection points of electric and electronic waste. For detailed information on recycling, contact your local authorities, waste disposal company or point of purchase. Separate collection and recycling of this type of waste contributes to the protection of the natural resources and is safe to health and the environment. Weight of the equipment is specified in the document.

Contact:
Roger Sp. z o. o. sp. k.
82-400 Sztum
Gościszewo 59
Tel.: +48 55 272 0132
Fax: +48 55 272 0133
Tech. support: +48 55 267 0126
E-mail: support@roger.pl
Web: www.roger.pl