




# QUICK START GUIDE

Connection scheme of PR402DR controller and XM-8 elevator module

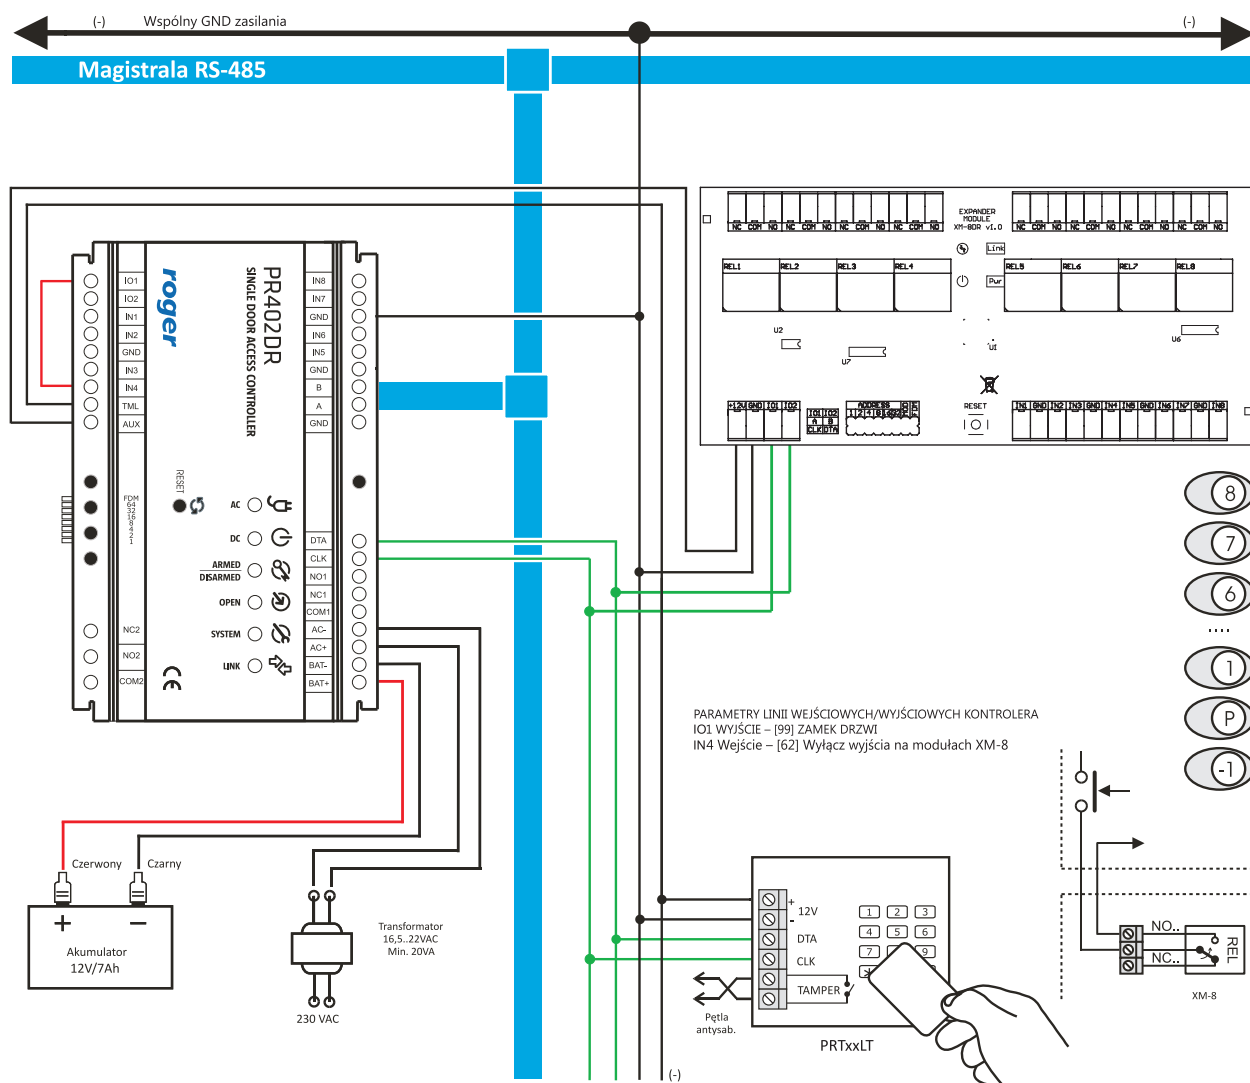

Typical connection scheme of PR402DR controller and XM-8 elevator module with automatic relays switching to OFF mode option.

## Technical support is available in weekdays:

- from **8:00 am** to **4:00 pm** at PSTN number **+48 55 267 01 26**
- from **4:00 pm** to **8:00 pm** at GSM number **+48 664 294 087**

## Legal Notice

This document is not intended to be a technical specification of the product and has informative character only. The Manufactures of product reserves right to change its characteristic without notice. The product features listed in this document refer to the entire series and depends on particular product version, configuration and additional equipment.

RevB © 2020 ROGER sp. z o.o. sp. k. All rights reserved. This document is a subject to the Terms of Use in their current version published at the [www.roger.pl](http://www.roger.pl)

ROGER sp. z o.o. sp. k.  
Gościszewo 59  
82-400 Sztum  
Poland

T. +48 55 272 0132  
F. +48 55 272 0133  
E. [roger@roger.pl](mailto:roger@roger.pl)  
I. [www.roger.pl](http://www.roger.pl)

**roger**